

AXR[®]900

SUPER PREMIUM RESIN FOR NEAR EDGE PRINTERS




EXCELLENT PRINTING QUALITY ON TEXTILE MATERIALS

EXCELLENT RESISTANCE TO WASHES AND DRY CLEANING



VERY GOOD RESISTANCE TO IRONING

AXR[®]900 is a resin ribbon for Corner Edge and Near Edge printers designed for the textile label printing market. It can also represent a relevant solution for niche resin applications (involving for example sterilization or resistance to some solvents) which are not satisfied by other resin ribbons.

PRINTING QUALITY

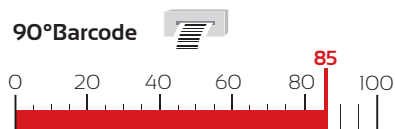



SENSITIVITY

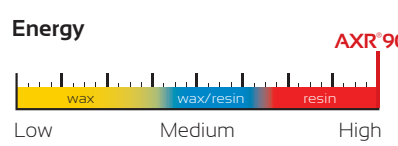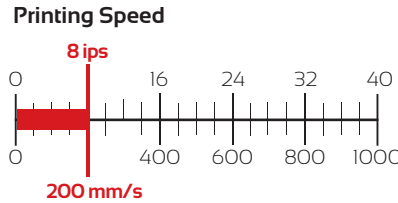

Receptor Compatibility

Uncoated	
Coated	●
High gloss	●●
Synthetics	●●●
Cotton	●●●
Acetate	●●●
Polyester	●●●

RESISTANCES

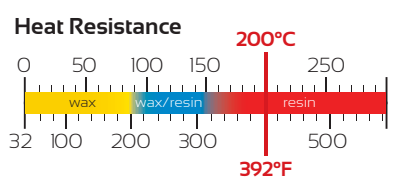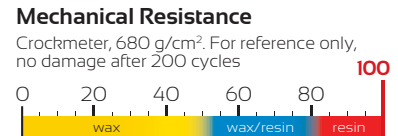

Other Resistances

Light	0 1 2 3 4 5 6 7
Blue Wool:	0 1 2 3 4 5 6 7 8 9 10
Water	0 20 40 60 80 100
Submerge:	0 20 40 60 80 100
Washing	0 20 40 60 80 100
Home:	0 20 40 60 80 100
Industrial:	0 20 40 60 80 100
Dry cleaning:	0 20 40 60 80 100
Bleach:	0 20 40 60 80 100
Ironing:	0 20 40 60 80 100

APR[®]600

APX[®]650

AXR[®]600

AXR[®]800

AXR[®]900

complementary _____ SOLVENT RESISTANCE
 complementary _____ MATERIAL COMPATIBILITY
 lower _____ TEXTILE APPLICATIONS


AXR® 900

SUPER PREMIUM RESIN FOR NEAR EDGE PRINTERS

APPLICATION FIELDS

The characteristics of AXR® 900 answer the requirements of the following application fields:

(If your application is not among the ones below, please contact us)

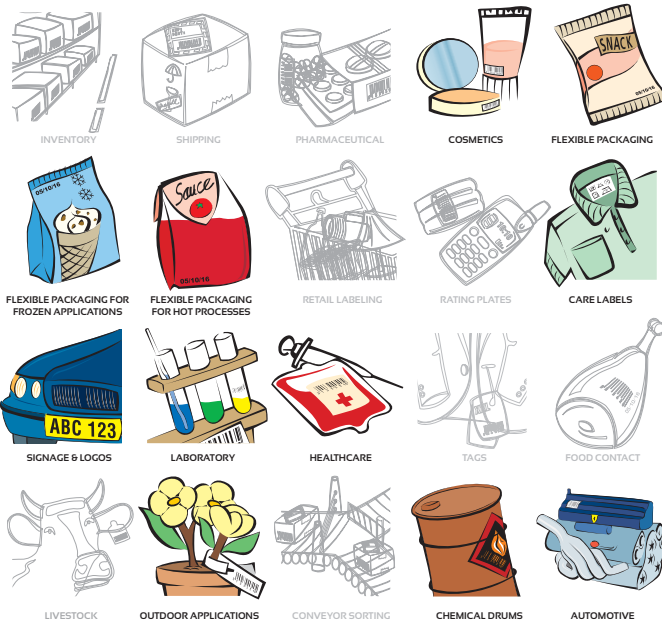

RIBBON SPECIFICATIONS

Backcoating:

Silicon based.
Friction coefficient:
Kd < 0.2.



Ink:

Resin.
Melting point:
85°C / 185°F
(ARMOR procedure).

Storage:

12 months, 5-35°C (40-95°F),
20-80 % Humidity Rate.

PET film:

Thickness: 4.5 µm.

Ribbon:

Thickness (black): < 8 µm.
The ribbon is anti static build-up treated.

CERTIFICATIONS

REACH / SVHC Free: 1907/2006/EC

Heavy metals: - 2002/95/EC
- 2002/96/EC
- 2011/65/EC

California Proposition 65



COLOUR RANGE

● Black

SUSTAINABLE DEVELOPMENT

ARMOR evaluation of AXR® 900:

To be compared with our other products.

Environment



Economy



The film is produced in one of the industry's most organised and awarded factories:



Quality, health, safety and environment certifications:

ISO 9001: 2008 ISO 14001: 2004
OHSAS 18001: 2007 ISO 50001: 2011



Responsible Care: International Council of Chemical Associations' charter towards constant improvements in health, safety and environment.



Global Compact: UN initiative inviting companies to apply fundamental ethical and environmental values.



All ARMOR product sheets are available on our website: www.armor-tt.com